


Product features

- Adopt PFC circuit scheme, high factor and low harmonic
- Full-ioslation driver
- Short circuit, over current and over voltage protection.
- Global multi-national certification optional (ETL, TUV, SAA, CB, CE)
- Conform to the world lighting safety standards
- 5 years quality warranty
- Use glue and aviation iron shell, heat dissipation is more effective

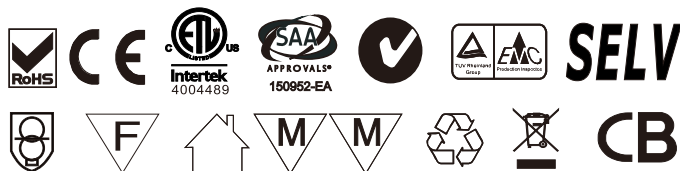

Electrical specifications

Input	Voltage range	90-130&180-240V/AC				
	Frequency range	50-60Hz				
	Power factor	>0.95				
	Full load efficiency	≥85%				
	AC current	0.6A/0.3A				
Output	Rated current	Constant Current			Constant Voltage	
	Rated current	1100mA	1500mA	1900mA	4000mA	2500mA
	Current accuracy	± 5%	± 5%	± 5%	± 10%	± 10%
	Output voltage	43-52V	32-42V	22-31V	12V	24V
	Rated power	60W				
Protection	Short circuit	Intermittent restart mode, after the exception can be automatically restored				
	Overcurrent	Hiccup mode, after the removal of abnormal flow can be automatically restored				
	Overvoltage	Hiccup mode, after the exception of abnormal pressure can be automatically restored				



Triac Dimmable

Shell structure

200.00 mm

180 mm

43.00 mm

93 mm

40 mm


16 mm

14 mm


5 mm

40 mm

主板固定螺丝柱直径 D:3mm

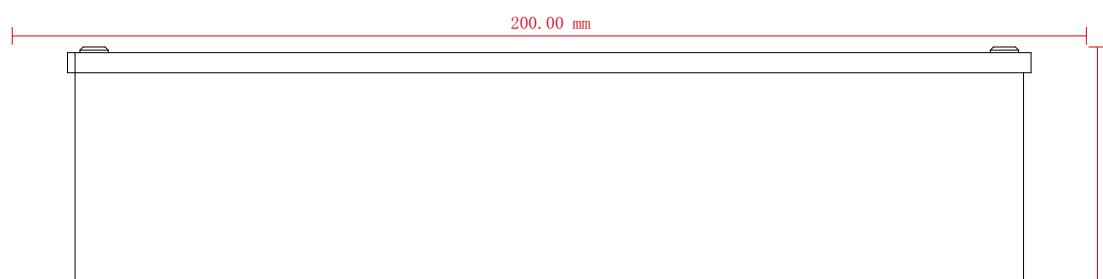

Wiring diagram

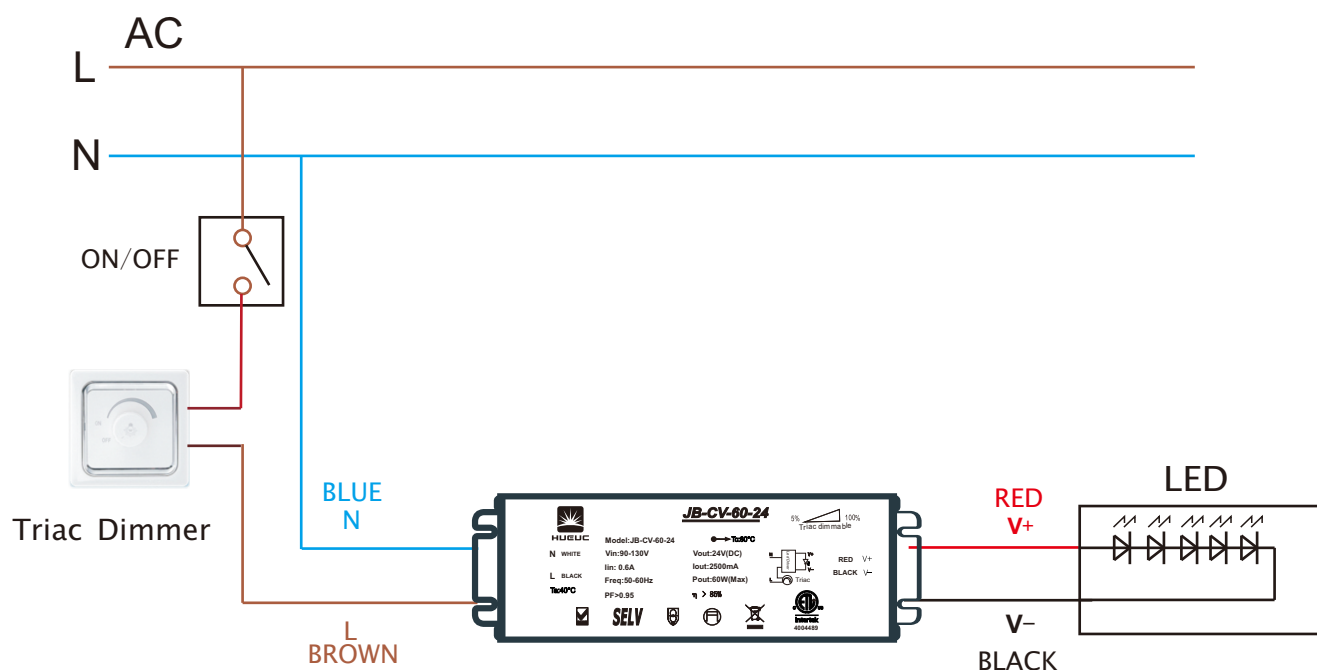

Packing

